
Guardrail Receivers



Compliant with all OSHA 1910 and OSHA 1926 Subpart M regulations.

Custom configurations not available. Not repairable. Contact customer service for details.

Guardrail Receivers are suitable for the following applications:

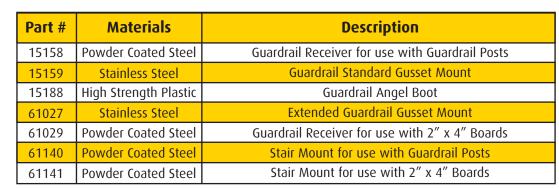

Fall Prevention: Guardrail Receivers may be used in Fall Prevention applications ONLY. Fall Prevention Systems are placed around the leading edges of any and all fall hazards to prevent a worker from going over an edge, and may be used in substitute of Fall Protection or safety netting systems. Installation requirements for Guardrail Receivers set forth in this manual MUST be adhered to. Personal Fall Arrest, Work Positioning, Climbing, Rescue, and any other systems must NEVER be connected to Fall Prevention Systems.

Surfaces more than 6' above lower levels require the use of a Fall Prevention or Fall Protection system.

For all Guardrail Receivers, fasteners MUST be completely embedded in substrate, and MUST be deemed compatible with applicable Guardrail Receiver by a Competent Person. Guardrail Receivers MUST be installed flush against substrate, and must allow guardrail posts to be positioned perpendicular to work surface. Refer to instructions for installation information.



Use of equipment in unintended applications may result in serious injury or death. NEVER make any connections to guardrail systems. NEVER lean or climb on guardrail systems.

UPC-A Codes: 15158: 672421151588; 15159: 672421151595; 15188: 672421151885; 61027: 672421610276; 61029: 672421610290; 61140: 672421611402; 61141: 672421611419



GUARDIA

#15158







#15188









#61140

